

BOOMLESS NUTATING SPRAYHEAD



The sprayhead uses solid stream nozzles and a nutating motion to provide blanket coverage out to 28 feet wide. An optional 8th section can be added to increase the coverage to 36 feet.

Additionally, our versatile “Long-Shot Boom” gives the operator the option of spraying 52 feet wide with the boom extended



Standard features include:

- Seven individual sections
- Solid stream nozzles
- Remote tilt control

Optional Features:

- 8th section for extended coverage.
- Remote fold (in/out) control.

Contact us for more information!

Manufactured by


NORSTAR
INDUSTRIES, INC.

2302 A ST SE, Auburn WA 98002

sales@norstarind.com
norstarind.com

T: (800) 735-1881
F: (253) 735-2051

NSC-20108-V2 NUTATING SPRAYHEAD SPRAY PATTERN W/ OPTIONAL 8TH SECTION

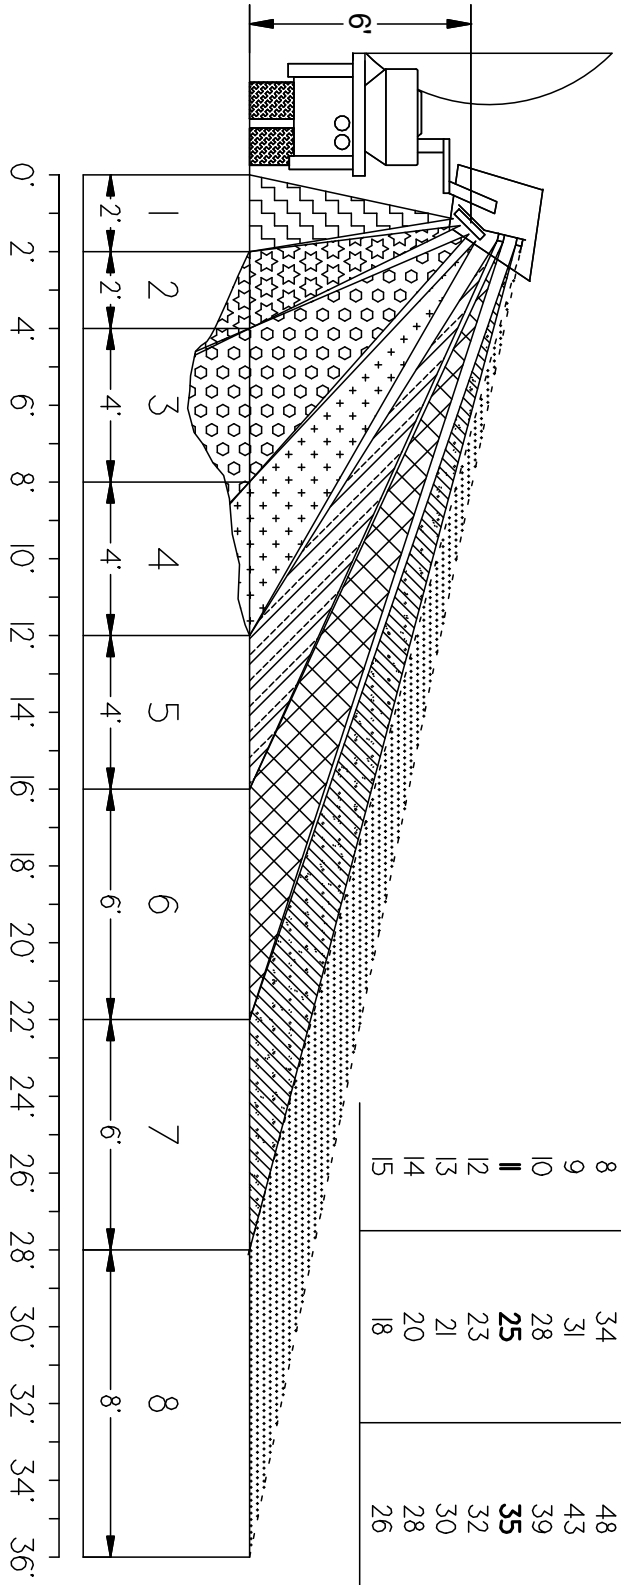

SPEED (MPH)	CARRIER APPLICATION RATE (GPA)		
	25 GPA NOZZLE SET	35 GPA NOZZLE SET	50 GPA NOZZLE SET
5	55	77	110
6	46	64	92
7	39	55	79
8	34	48	69
9	31	43	61
10	28	39	55
11	25	35	50
12	23	32	46
13	21	30	42
14	20	28	39
15	18	26	37

SECTION	25 GPA NOZZLE	35 GPA NOZZLE	50 GPA NOZZLE	QTY	WIDTH (FEET)	PRESSURE (PSI)
1	SI/8U-0004	SI/8U-0006	SI/8U-0008	4	2	20
2	SI/8U-0005	SI/8U-0007	SI/8U-0010	3	2	20
3	SI/8U-0007	SI/8U-0011	SI/8U-0015	4	4	20
4	SI/8U-0010	SI/8U-0014	SI/8U-0020	3	4	20
5	HI/8U-0007	HI/8U-0010	HI/8U-0013	4	4	25
6	HI/8U-0010	HI/8U-0014	HI/8U-0020	4	6	25
7	HI/8U-0010	HI/8U-0014	HI/8U-0020	4	6	25

OPTIONAL 8TH NOZZLE SECTION

SECTION	25 GPA NOZZLE	35 GPA NOZZLE	50 GPA NOZZLE	QTY	WIDTH (FEET)	PRESSURE (PSI)
8	HI/4U-0030	HI/4U-0040	HI/4U-0050	2	8	30

NORSTAR INDUSTRIES, INC.
 2302 A ST SE
 AUBURN WA 98002 T: (253) 735-1881
 F: (253) 735-2051

TITLE: NUTATING SPRAYHEAD PATTERN

DRAWN BY: TPB	CHECKED BY:	SCALE: 1:60	PAGE: 1/1
DATE CREATED: 8/13/10	DRAWING NUMBER:	REVISION NUMBER: A	